



Eleph Tech Innovation Pvt. Ltd.



# Eleph Tech Providing Smart Home Service

A home automation company specializes in smart technology solutions that enhance convenience, security, and energy efficiency in homes.



7827087358, 6395592881



## Director of Elephtech Innovation Pvt. Ltd.

# RAJ KUMARI

Rajkumari, Director of Elephtech Innovation Pvt Ltd, holds a master's in psychology and a diploma in yoga and naturopathy. With over five years of experience as a counselor and therapist, she has also dedicated 10 years to social work with the International Naturopathy Organisation (INO). Rajkumari's expertise 6 years extends to marketing and leadership, having served 5 years as a director at Pinglaksh Anveshnam Pvt Ltd. Now, she leads Elephtech Innovation, driving the company toward innovative wellness and home automation solutions.

## Our Trusted Clients



They trust our solutions to transform their spaces with cutting-edge automation technology.



Our trusted clients are forward-thinking individuals and businesses who prioritize innovation, efficiency, and smart living.



Our trusted clients trust on us to bring intelligence and innovation into their homes.



We give our expertise to create seamless, intelligent home environments that enhance comfort, security, and energy efficiency.



We empower our clients with expert solutions that transform their spaces into smart, efficient, and secure environments.



# CREATE your home smart with us.

A home automation system will monitor and/or control home attributes such as lighting, climate, entertainment systems, and appliances.

## Table of Content

What is Eleph Tech Innovation ?	1
Why Eleph Tech Innovation ?	2
Smart Retrofit Devices	3
Smart Switches (Premium Touch Pannel)	5
Smart Switched (Square Touch Panel )	7
Ir Blaster	9
Smart Curtain	10
Smart Door Lock	11
Smart Sensors	13
Voice Control	15
Eleph Tech Innovation Mobile App	16
Water Pump Automation	17



ABOUT OUR CENTER



# WE SOLVE YOUR PROBLEM

We provide smart automation solutions for seamless home control, security, and energy efficiency.

- ✓ Provide Smart Door Locks
- ✓ Provide Smart Sensors
- ✓ Provide Smart Curtains

We offer cutting-edge Smart Door Locks that enhance home security with keyless entry, remote access, and advanced encryption, ensuring safety and convenience.

Our Smart Sensors provide real-time monitoring for motion, temperature, humidity, and security alerts, creating a safer and more efficient living environment.







## About Eleph Tech

With years of experience in the industry, we take pride in offering the best home automation solutions tailored to your lifestyle. Our expertise ensures seamless integration, top-quality service, and innovative technology that enhances convenience, security, and efficiency.

### Property Features

- Living Room
- Bed Room
- Bath Room
- Drawing Room

## SMART HOME AUTOMATION SERVICES

### Get In Touch



7827087358, 6395592881



info@elephtech.in



www.elephtech.in

# SUSTAINABLE, INTELLIGENT AUTOMATION SOLUTIONS FOR YOUR HOME.



No Extra Wiring



No Modification



Quick Installation



Electricity saving



Download on the  
App Store



GET IT ON  
Google Play



7827087358, 6395592881



www.elephotech.in



# Why Eleph Tech Innovation ?



## Comfort & Convenience

Automate all home appliances ON/OFF based on time, temperature, etc.

## Control From Anywhere

Switch ON/OFF lights, fan, AC and many more from anywhere in the world.

## Enhanced Security

Get mobile alerts on movement detection and trigger events accordingly.

## Save Energy

Track energy consumption  
Auto Switch off lights & water motors and saves energy

## Create Scenes

ON/OFF combination of lights, fan, TV & other in single tap and voice command

## Voice Control

Control Home Appliances through Alexa, Google, Siri Shortcut




7827087358, 6395592881



[www.elephtech.in](http://www.elephtech.in)

# Eleph Tech Innovation Curtain Track Kit 5.2m & 3.2m

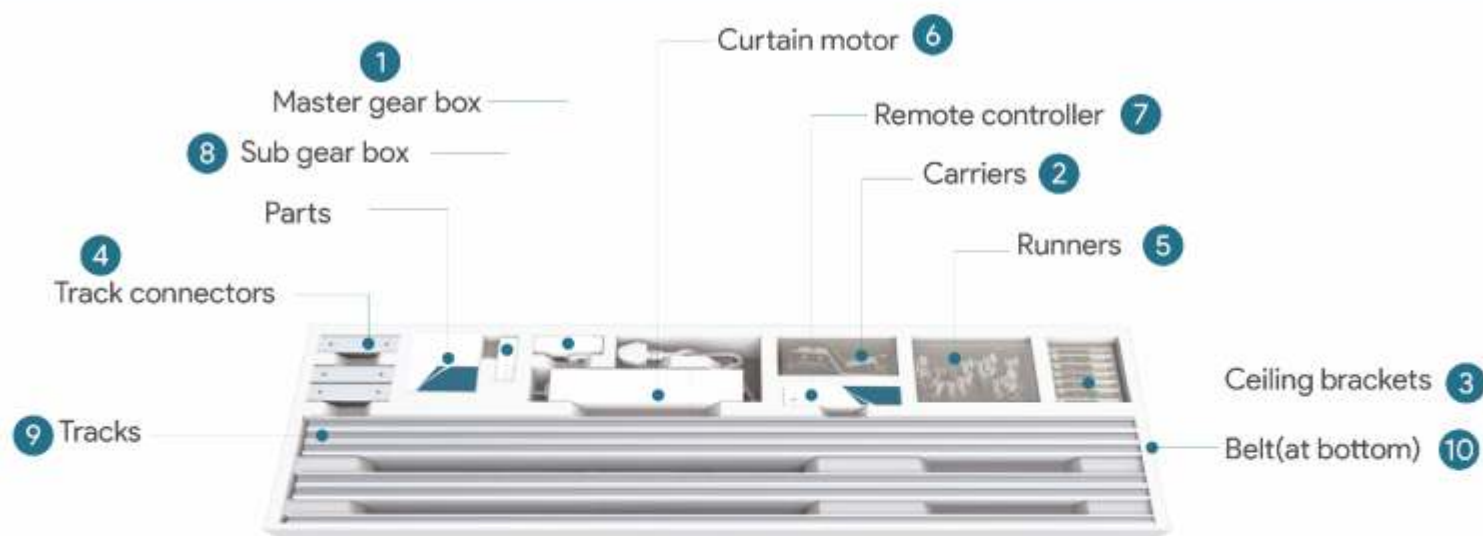

## Technical Specification

- >Curtain Operator-1, (5 Wired) Transmitter-1, 3.2metre Track Kit-1, Accessories
- >Curtain Operator-1, (5 Wired) Transmitter-1, 5.2mtr Track-1, Accessories



7827087358, 6395592881



[www.elephtech.in](http://www.elephtech.in)





## IR Blaster

### Technical Specification

Power Input: 5V DC (Mobile adapter)

Power Consumption: Max. 2W

IR Range: 15-20 meters in line of sight

Dimensions- Height:44mm Width:40mm Depth:24mm

Number of IR LEDs: 4

IR Coverage:360°



## HD Plug - 16A V2

### Technical Specification

Power input: 240V AC, 50/60Hz.

Maximum Resistive Load: 2500W

Typical standby power: <0.8W.

Power measurement accuracy Class 1.

Total Power Input: 16A

Maximum Inductive Load: 1000W

Maximum Current per Channel:16A



7827087358, 6395592881



[www.elephitech.in](http://www.elephitech.in)



## 1 Switch V3

### Technical Specification

Power input: 220 to 240V AC, 50/60Hz.

Max Current Output: Up to 16A

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel: 1800W

LED Load: 200 W or 6 Nos (whichever is higher) on each channel.

Inductive Load: 800W

Typical standby power: <0.8W. Dimensions: 56x52x16mm

Surge Protection: 2.5KV (Tested Upto 4KV)



## 2 Switch V3

### Technical Specification

Power input: 220 to 240V AC, 50/60Hz. Max Current Output: 16A

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel: 1800W

LED Load: 200W or 6 Nos (whichever is higher) on each channel.

Inductive Load: 800W

Typical standby power: <0.8W Dimensions: 56x52x16mm

Surge Protection: 2.5KV (Tested Upto 4KV)



7827087358, 6395592881



www.elephotech.in



80%



## 4 Switch V3

### Technical Specification

Power input: 220 to 240V AC, 50/60Hz. Max Current Output: 16A

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel:1800W

LED Load: 200W or 6 Nos(whichever is higher) on each channel.

Inductive Load: 800W

Typical standby power: <0.8W

Dimensions: 80x52x16mm

Surge Protection: 2.5KV(Tested Upto 4KV)



## 6 Switch V3

### Technical Specification

Power input: 220 to 240V AC, 50/60Hz. Max Current Output: 16A

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel:1800W

LED Load: 200W or 6 Nos(whichever is higher) on each channel.

Inductive Load: 800W

Typical standby power: <0.8W

Dimensions: 56x52x16mm

Surge Protection: 2.5KV(Tested Upto 4KV)



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)



## NEXA 1 Switch V2

### Technical Specification

Power input: 220 to 240V AC, 50/60Hz.

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel:800W

LED Load: 120W or 6 Nos(whichever is higher) on each channel.

Inductive Load: 400W

Typical standby power: <0.8W

Dimensions: 77x40x25 mm

Surge Protection: 2.5KV(Tested Upto 4KV)



## NEXA 2 Switch V2

### Technical Specification

Power input: 220 to 240V AC, 50/60Hz.

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel:800W

LED Load: 120W or 6 Nos(whichever is higher) on each channel.

Inductive Load: 400W

Typical standby power: <0.8W

Dimensions: 77x40x25 mm

Surge Protection: 2.5KV(Tested Upto 4KV)







## NEXA 3 Switch V2

### Technical Specification

Power input: 220 to 240V AC, 50/60Hz.

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel:800W

LED Load: 120W or 6 Nos(whichever is higher) on each channel.

Inductive Load: 400W

Typical standby power: <0.8W

Dimensions: 77x40x25 mm

Surge Protection: 2.5KV(Tested Upto 4KV)



## NEXA 5 Switch V2

### Technical Specification

Power input: 220 to 240V AC, 50/60Hz.

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel:800W

LED Load: 120W or 6 Nos(whichever is higher) on each channel.

Inductive Load: 400W

Typical standby power: <0.8W

Dimensions: 77x40x25 mm

Surge Protection: 2.5KV(Tested Upto 4KV)





## **NEXA 1+1 Switch V2**

### **Technical Specification**

Power input: 220 to 240V AC, 50/60Hz.

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel:800W

LED Load: 120W or 6 Nos(whichever is higher) on each channel.

Inductive Load: 400W

Typical standby power: <0.8W

Dimensions: 77x40x25 mm

Surge Protection: 2.5KV(Tested Upto 4KV)



## **NEXA HD 16A Switch V2**

### **Technical Specification**

Power input: 220 to 240V AC, 50/60Hz.

Maximum Supportive Load-7.5KW (32A).

Incandescent lamp/Resistive Load Per Channel:800W

LED Load: 120W or 6 Nos(whichever is higher) on each channel.

Inductive Load: 400W

Typical standby power: <0.8W

Dimensions: 77x40x25 mm

Surge Protection: 2.5KV(Tested Upto 4KV)



7827087358, 6395592881



www.elephotech.in






## 25A HD+ Switch

### Technical Specification

Power Input: 220 to 240V AC, 50/60Hz. Max Current Output: 25A  
 Maximum Resistive Load: 4000W  
 Maximum Inductive Load: 2000W Max standby power: <0.8W.  
 Power measurement accuracy: ±5%.  
 Operating temperature: 0°C to 70°C  
 Operating distance from Wi-Fi router: up to 30 meters\*.  
 (depending upon router and its placement)  
 Energy Monitoring: Yes, Class II Wi-Fi 802.11 b/g/n  
 Communication Wi-Fi: Connects to 2.4 GHz,

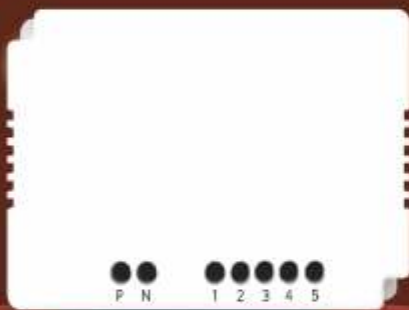

## 4+1 Switch V2

### Technical Specification

Power input : 240V AC, 50/60Hz. Dimmer Levels : 0 to 4  
 Incandescent lamp/Resistive Load Per Channel : 800W  
 LED Load : 120W or 4 Nos (whichever is higher) Inductive Load: 400W  
 Typical standby power : <0.8W. Dimensions : 133x55x24 mm  
 Operating distance from Wi-Fi router: up to 30 meters\*.  
 No of Channels: 5(4+1) Capacitive Dimming Channels : 1  
 Communication Wi-Fi : Connects to 2.4 GHz, Wi-Fi 802.11 b/g/n  
 Surge Protection : 2.5KV (Tested Up to 4KV)



7827087358, 6395592881



www.elephotech.in

10

80%



## 4 Touch-Pro

### Technical Specification

Power Supply: 120-240 VAC, 50/60 Hz    Surge Protection: 2KV Relay-10A

Load Type: LED Load : 36W or 18W\*2 (Max 2 load on single channel upto 36W)

Inductive Load : 120W (single channel)


Resistive Load: 800W (single channel)

Standby Power : < 1W (IoT)

Testing switching cycles: 1,00,000 Ultra Flash touch RGB Led

Humidity: 0° to 70° Celsius.

Dimensions: 45x45x48 mm

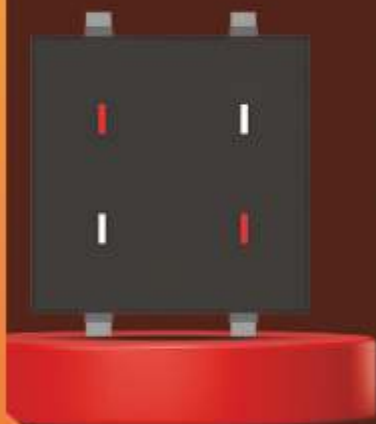

## HD Touch-Basic

### Technical Specification

Power Supply: 120-240 VAC, 50/60 Hz    Surge Protection: 2KV Relay-16A

Inductive Load : 800W (single channel)

Resistive Load: 1800W (single channel)

Standby Power : < 1W (IoT)

Testing switching cycles: 1,00,000 Ultra Flash touch Monochrome led

Humidity: 0° to 70° Celsius.

Dimensions: 45x45x45 mm



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)





## Fan Dimmer Touch-Basic

### Technical Specification

Power Supply: 120-240 VAC, 50/60 Hz Surge Protection: 2KV Relay-6A

LED Load : 36W or 18W\*2 (Max 2 load on single channel upto 36W)

Inductive Load : 120W (single channel)

Resistive Load: 800W (single channel)

Standby Power : < 1W (IoT)

Testing switching cycles: 1,00,000 Ultra Flash touch Monochrome led

Humidity: 0° to 70° Celsius.

Dimensions: 45x45x48 mm



## HD Touch-Pro

### Technical Specification

Power Supply: 120-240 VAC, 50/60 Hz Surge Protection: 2KV Relay-16A

Inductive Load : 800W (single channel)

Resistive Load: 1800W (single channel)

Standby Power : < 1W (IoT)

Testing switching cycles: 1,00,000 Ultra Flash touch RGB Led

Humidity: 0° to 70° Celsius.

Dimensions: 45x45x45 mm



7827087358, 6395592881



www.elephotech.in

12



## Smart Lock Pro-Silver

### Technical Specification

Battery Mode: 4x AA

Batteries Included : No

Standby: 6 months

unlock Modes- RFID, OTP, Lock Code, Physical Key, App

Wireless: Wi-Fi 2.4G

Operation Temperature: -20° to 55°

Operation Humidity: 95%



## Smart Glass Door Lock

### Technical Specification

Battery Mode: 4x AA Batteries Included : No Standby: 6 month

Unlock Modes- Fingerprint, RFID, Lock Code, App

Wireless: Wi-Fi 2.4G Operation Temperature: -20 °C to 55 °C Operation

Humidity:95% Dimension:180mm\*105mm\*65mm



7827087358, 6395592881



www.elephotech.in

13





## Smart fingerprint Padlock

### Technical Specification

Battery Mode: 4x AA

Batteries Included: No

Standby: 6 months

Unlock Modes- Fingerprint, RFID, Lock Code, Physical Key, App

Wireless: Wi-Fi 2.4G Operation

Temperature: -20 °C to 55 °C Operation

Humidity: 95% Dimension: 180mm\*105mm\*65mm



## Smart Lock V2-Black

### Technical Specification

Battery Mode: 4x AA

Batteries Included: No

Standby: 6 months

Unlock Modes- fingerprint, RFID, OTP, Lock Code,

Physical Key, App Wireless: Wi-Fi

2.4G Operation Temperature: 20° to 55°

Operation Humidity: 95%



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)



## Smart Wooden Door Lock

### Technical Specification

Battery Mode: 4x AAA      Batteries Included: No

Standby: 6 months

Unlock Modes- Fingerprint, RFID, Lock Code, Physical Key, App

Wireless: Wi-Fi 2.4G Operation

Temperature: -20 °C to 55 °C Operation

Humidity: 95% Dimension: 180mm\*105mm\*65mm



## Handle Door Lock

### Technical Specification

Battery Mode: 4x AAA

Batteries Included : No Standby:

6 month Unlock Modes Fingerprint, Manual Keys

Wireless: Wi-Fi 2.4G

Operation Temperature: -20 °C to 55 °C Operation

Humidity: 95% Dimension: 180mm\*105mm\*65mm



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)



80%



## Smart Metal Door Lock

### Technical Specification

Battery Mode: 4x AAA Batteries Included: No Standby: 6 month

Power Options: Battery / 12v Power Input using external Adapter

Unlock Modes- Fingerprint, RFID, Lock Code, Physical Key, App

Wireless: Wi-Fi 2.4G

Operation Temperature: -20 °C to 55 °C

Operation Humidity: 95%

Dimension: 180mm\*105mm\*65mm



## Smart Handle Door Lock

### Technical Specification

Battery Mode: 4x AAA Batteries Included: No

Standby: 6 months

Unlock Modes- Fingerprint, Lock Code, Physical Key, App

Wireless: Wi-Fi 2.4G Operation

Temperature: -20 °C to 55 °C Operation

Humidity: 95% Dimension: 180mm\*105mm\*65mm



7827087358, 6395592881



www.elephotech.in



## Smart Wooden Door Lock

### Technical Specification

Battery Mode: 4x AAA

Batteries Included: No

Standby: 6 months

Unlock Modes- Fingerprint, RFID, Lock Code, Physical Key, App

Wireless: Wi-Fi 2.4G

Operation Temperature: -20 °C to 55 °C

Operation Humidity: 95%

Dimension: 180mm\*105mm\*65mm



## Curtain Track set

### Technical Specification

High Quality DIY Curtain track set. 4.2M track with Motor. WiFi Support inbuilt. Works directly with Kiot powered Apps.



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)

18





## Curtain Blind motor

### Technical Specification

A simple and unique solution for different kinds of roller blinds/curtains. Supports different sizes of curtain chains. Works with AC power. Inbuilt wifi, ready to work with Kiot [powered Apps.



## Smart MCB 4Pole 100A

### Technical Specification

Protection level: IP20 , Service Short circuit capacity: 6KA  
 Rack rated current: 125A , Rated Short Circuit capacity: 6KA  
 Rated current: 100A ,Rated insulation voltage: 500 V  
 Rated impulse withstand voltage: 6000V,  
 Control level voltage: AC per phase 240V  
 Phase line leakage current: steady - state current consumed per phase line  $\leq 0.2\text{mA}$  , Operating temperature:-25 ° C ~ +65 ° C  
 Dimensions: 89x95x72 mm



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)



## Smart BLDC Fan-5 Blade

### Technical Specification

Driver comes with dual EMI cancellation filter.


Consumes <35W.

Widest working voltage range of 90-300V.

Inbuilt active PFC, Power factor > 0.98.

Surge protection >5kv.

Driver comes with overload & under voltage protection.

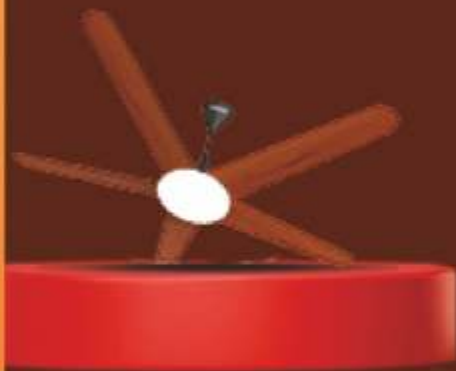

## Smart BLDC Fan

### Technical Specification

Driver comes with dual EMI cancellation filter.


Consumes <35W.

Widest working voltage range of 90-300V.

Inbuilt active PFC, Power factor > 0.98.

Surge protection >5kv.

Driver comes with overload & under voltage protection.

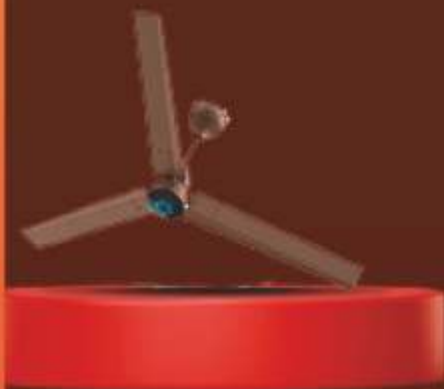





## Smart BLDC Fan-3 Blade

### Technical Specification

Driver comes with dual EMI cancellation filter.

Consumes <35W.

Widest working voltage range of 90-300V.

Inbuilt active PFC, Power factor > 0.98.

Surge protection >5kv.

Driver comes with overload & under voltage protection.



## RGBW Controller

### Technical Specification

Power input: 12 ~ 24V DC

Output: 12V, 24V DC

Connector: 5- pin male connector \ is included in the box (Type +GRBW)

Typical standby power: <1W.

Dimming Channels: DC LED Dimming channels x 4 (RGBW)

Supported up to 20m

Dimensions: 56x40x25 mm





## Pulse Switch/Curtain Controller

### Technical Specification

Power input : 240V AC, 50/60Hz.

Disclaimer: Attach only signal wires of curtain/gate motor to device

Typical standby power : <0.8W.

Operating distance from Wi-Fi router: up to 30 meters\*. (depending upon router and its placement)

Operating temperature : 0°C to 70°C



## LED 18W 2LED'S and 1 Driver

### Technical Specification

Output voltage : 36-80Vdc , Output current : 270mA±5%

Load power range-18W , Dimming range -0-100%

Input voltage : 175-264Vac(120-300Vdc)

Input current : Max 0.20A at 185Vac Power factor>0.8

Anti-Surge L-N:2kv

Ripple & Noise - <80mv



7827087358, 6395592881



www.elephotech.in



80%



## LED Dimmer Driver\_18W

### Technical Specification

Output voltage : 36-80Vdc , Output current : 270mA±5%

Load power range-18W , Dimming range -0-100%

Input voltage : 175-264Vac(120-300Vdc)

Input current : Max 0.20A at 185Vac

Power factor>0.8

Anti-Surge L-N:2kv

Ripple & Noise - <80mV



## LED Dimmer Driver\_18W CCT

### Technical Specification

Output voltage : 36-80Vdc , Output current : 270mA±5%

Load power range-18W , Dimming range -0-100%

Input voltage : 175-264Vac(120-300Vdc)

Input current : Max 0.20A at 185Vac

Power factor>0.8

Anti-Surge L-N:2kv

Ripple & Noise - <80mV



7827087358, 6395592881



www.elephotech.in



## 2 Channel Triac Dimmer



### Technical Specification

Output Phase Cut dimming      Universal AC input: 100-277VAC  
Power Factor: up to 0.99 on full brightness  
Dimming range: 0-100%      Load: 5W to 200W Flicker-free  
Protection: short circuit/over loading/ Over temperature  
Compatible with Forward phase, Reverse phase, Triac Dimmers ,  
incandescent bulbs, incandescent like led decorative bulbs  
Cooling by free air convection  
Suitable for LED lighting and moving sign applications

## Sensor Hub



### Technical Specification

Power input: 240V AC, 50/60Hz.  
Power Consumption: Max. 2W  
Number of IR LEDs: 4  
IR Range: 10-15 meters in line of sight  
IR Coverage: 180°  
Dimensions- Height: 30mm Width: 85mm Depth: 85mm







## PIR Motion Sensor

### Technical Specification

Power Source: 220 - 240V/AC , Power Frequency: 50/60Hz

Ambient Light: <3-2000LUX (adjustable)

Rated Load:300W-1200W, Detection Range:360°

Time Delay:Min.-10sec  $\pm$  3sec; Max. \-7min  $\pm$  2min

Detection Distance: 6m max(<24°C)

Power Consumption:approx. 0.5W

Installation Height:2.2-4m, Detection Moving Speed:0.6-1.5m/s



## Microwave Motion Sensor

### Technical Specification

Power Source: 220 - 240V/AC , Power Frequency: 50/60Hz

Ambient Light: <3-2000LUX (adjustable)

Rated Load:300W-800W, Detection Range:360°

Time Delay:Min.-10sec  $\pm$  3sec; Max. \-12min  $\pm$  1min

Detection Distance: 1-8m max(<24°C)

Power Consumption:approx. 0.9W

Installation Height:2-6m, Detection Moving Speed:0.6-1.5m/s





## Smart COB Driver (24W-36W)

### Technical Specification

Wireless Type: Kiot Wi-Fi Connectivity      Flicker Level: Flicker-free

Total Harmonic Distortion: THD  $\leq$  10% (@ Full Load / 230VAC)

Power Supply Topology: Isolated and Flyback

Dimming Range: 0 – 100%

Dimming Method: PWM

Input Voltage: 90VAC – 300VAC      Frequency: 50/60Hz

Short Circuit Protection: Yes, recovers automatically after reset power

Over Voltage Protection: Yes, recovers automatically after reset power

Efficiency (Typical): 90% @ 230VAC Full Load      Anti-Surge: 4.5KV

Current Tolerance:  $\pm$ 5%

Working Temperature: -10°C ~ +65°C

Working Humidity: 20~95%RH



## Smart CCT Rose Black Reflector COB Light (16W)



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)

26





## Smart Tiltable COB Light (30W)

### Technical Specification

Wireless Type: Kiot Wi-Fi Connectivity      Flicker Level: Flicker-free  
Total Harmonic Distortion: THD  $\leq$  10% (@ Full Load / 230VAC)  
Power Supply Topology: Isolated and Flyback  
Dimming Range: 0 – 100%      Dimming Method: PWM  
Input Voltage: 90VAC – 300VAC      Frequency: 50/60Hz  
Short Circuit Protection: Yes, recovers automatically after reset power  
Over Voltage Protection: Yes, recovers automatically after reset power  
Efficiency (Typical): 90% @ 230VAC Full Load      Anti-Surge: 4.5KV  
Current Tolerance:  $\pm$ 5%      Working Temperature:  $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$   
Working Humidity: 20~95%RH



## Smart CCT Rose Gold COB Light (16W)



7827087358, 6395592881



www.elephotech.in

27

80%



## Smart WiFi Bi-Channel CCT COB18W

### Technical Specification

Wireless Type: Kiot Wi-Fi Connectivity    Flicker Level: Flicker-free

Total Harmonic Distortion: THD  $\leq$  10% (@ Full Load / 230VAC)

Power Supply Topology: Isolated and Flyback

Dimming Range: 0 – 100%

Dimming Method: PWM

Input Voltage: 90VAC – 300VAC

Frequency: 50/60Hz

Short Circuit Protection: Yes, recovers automatically after reset power

Over Voltage Protection: Yes, recovers automatically after reset power

Efficiency (Typical): 90% @ 230VAC Full Load    Anti-Surge: 4.5KV

Current Tolerance:  $\pm$ 5%

Working Temperature:  $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$

Working Humidity: 20~95%RH



## Smart Three-Phase Energy Meter30A each phase



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)





## Dimmable CCT 36W 2X2 Panel RF

### Technical Specification

Driver comes with dual EMI cancellation filter. Consumes <35W.

Widest working voltage range of 90-300V.

Inbuilt active PFC, Power factor > 0.98.

Surge protection >5kv.

Driver comes with overload & under voltage protection.

## Smart Single-Phase Energy Meter 30A



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)



## Touch 10 Switch 1 Fan 2 Socket Technical Specification



Operating Voltage : 220 to 240 V AC.

Technology : Cap Sense 1 Million Touch capacity.

Load : 10 AMP Load Max current per load

Operating environment : Temperature : 0 to 45 C Ambien, Humidity

:5% to 90% RH Load Type : CFL,LED Light, Tube Light, Resistive Load, Wired incandescent Lighting 25AMP for Air conditioner, water geyser

Separate phase for HD load RGB Led for on/off

9)1-2way Option in all models can be customized

## Touch 8 Switch 1 Fan 1 Socket Technical Specification



Operating Voltage : 220 to 240 V AC.

Technology : Cap Sense 1 Million Touch capacity.

Load : 10 AMP Load Max current per load

Operating environment : Temperature : 0 to 45 C Ambien, Humidity

:5% to 90% RH Load Type : CFL,LED Light, Tube Light, Resistive Load, Wired incandescent Lighting 25AMP for Air conditioner, water geyser

Separate phase for HD load RGB Led for on/off

1-2way Option in all models can be customized.



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)

30





## Scene Controller

### Technical Specification

Operating Voltage : 220 to 240 V AC.

Technology : Cap Sense 1 Million Touch capacity.

Load : 10 AMP Load Max current per load

Operating environment : Temperature : 0 to 45 C Ambien, Humidity

:5% to 90% RH Load Type : CFL,LED Light, Tube Light, Resistive Load, Wired incandescent Lighting

25AMP for Air conditioner, water geyser

Separate phase for HD load RGB Led for on/off

1-2way Option in all models can be customized.



## Touch 6 Switch 1 Fan 1 Socket

### Technical Specification

Operating Voltage : 220 to 240 V AC.

Technology : Cap Sense 1 Million Touch capacity.

Load : 10 AMP Load Max current per load

Operating environment : Temperature : 0 to 45 C Ambien, Humidity

:5% to 90% RH Load Type : CFL,LED Light, Tube Light, Resistive Load, Wired incandescent Lighting

25AMP for Air conditioner, water geyser Separate phase for HD load

RGB Led for on/off 1-2way Option in all models can be customized



7827087358, 6395592881



www.elephotech.in

31



## **Touch 6 Switch 1 Fan 1 Socket**

### **Technical Specification**

Operating Voltage : 220 to 240 V AC.

Technology : Cap Sense 1 Million Touch capacity. 10 AMP Load Max current per load

Humidity : 5% to 90% RH

Operating environment : Temperature : 0 to 45 C Ambien,

Load Type : CFL,LED Light, Tube Light, Resistive Load, Wired incandescent Lighting 25AMP for Air conditioner, water geyser

Separate phase for HD load RGB Led for on/off 1-2way Option in all models can be customized.



## **Edge 4 Switch 1 Fan**

### **Technical Specification**

Operating Voltage : 220 to 240 V AC.

Technology : Cap Sense 1 Million Touch capacity.

Load : 10 AMP Load Max current per load

Operating environment : Temperature : 0 to 45 C Ambien, Humidity

:5% to 90% RH Load Type : CFL,LED Light, Tube Light, Resistive Load, Wired incandescent Lighting

25AMP for Air conditioner, water geyser Separate phase for HD load

RGB Led for on/off 1-2way Option in all models can be customized



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)

32



80%



## Edge 6 Switch 1 Fan 1 Socket Technical Specification

Operating Voltage : 220 to 240 V AC.

Technology : Cap Sense 1 Million Touch capacity.

Load : 10 AMP Load Max current per load

Operating environment : Temperature : 0 to 45 C Ambien, Humidity :5% to 90% RH

Load Type : CFL,LED Light, Tube Light, Resistive Load, Wired incandescent Lighting

25AMP for Air conditioner, water geyser      Separate phase for HD load  
RGB Led for on/off      1-2way Option in all models can be customized



## AI Wifi PTZ Camera Technical Specification

3MP, HD, Zoom support      Engineering plastic, outdoor use

Insert SIM, power on, ready to use—no setup needed.

Supports TF card for secure video storage.

MIC, speaker, white/IR light, two-night vision modes: B/W, full color  
Humanoid detection with alarm, light activation, and real-time notifications

IP66 waterproof, 4000V lightning protection, anti-surge



7827087358, 6395592881



www.elephotech.in

80%



## AI Wifi Dome Camera

### Technical Specification

3MP, HD, Zoom support      Engineering plastic, outdoor use

Insert SIM, power on, ready to use—no setup needed.

Supports TF card for secure video storage.

MIC, speaker, white/IR light, two-night vision modes: B/W, full color

Humanoid detection with alarm, light activation, and real-time notifications

IP66 waterproof, 4000V lightning protection, anti-surge



## AI Wifi Bullet Camera

### Technical Specification

3MP, HD, Zoom support      Engineering plastic, outdoor use

Insert SIM, power on, ready to use—no setup needed.

Supports TF card for secure video storage.

MIC, speaker, white/IR light, two-night vision modes: B/W, full color

Humanoid detection with alarm, light activation, and real-time notifications

IP66 waterproof, 4000V lightning protection, anti-surge



7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)



80%



## Automated Drip Irrigation

### Technical Specification



Manual Control – Operate valves directly through the controller.

Online Remote Access – Control valves from anywhere via the internet.

Scene Setting – Create and activate custom valve configurations (scenes) for specific needs.

Scheduling – Set specific times for valve operations automatically.

Workflow Automation – Define workflows to trigger valve actions based on conditions or sequences.




7827087358, 6395592881



[www.elephotech.in](http://www.elephotech.in)

# Home Automation Icons

## Appliances

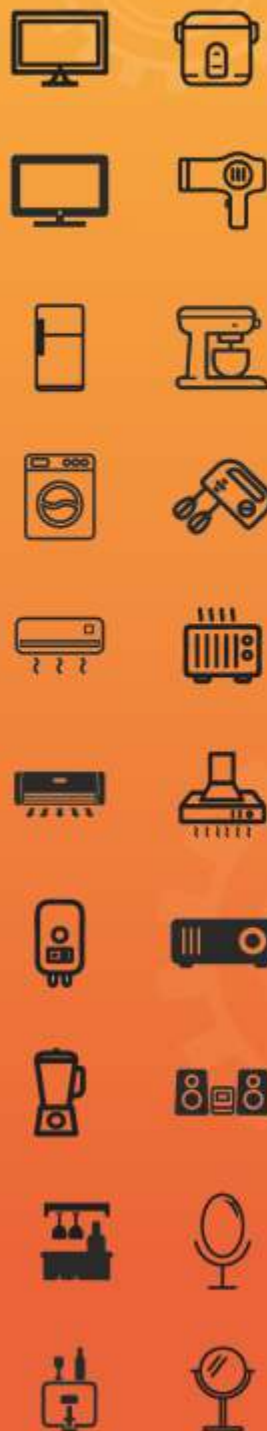

## Scene



## Fan



## Lighting



## Lamp



## Accessories









# Eleph Tech

 7827087358, 6395592881

 [info@elephtech.in](mailto:info@elephtech.in)

 [www.elephtech.in](http://www.elephtech.in)



**88-B Udyog Vihar, Phase V, Gurugram,  
Haryana-122016, India**